


DIN 912 (ISO 4762)

DIN 912 (ISO 4762) s celým závitem (b = L)

DIN 912 (ISO 12474) s jemným závitem

ISO 14579 s drážkou TORX

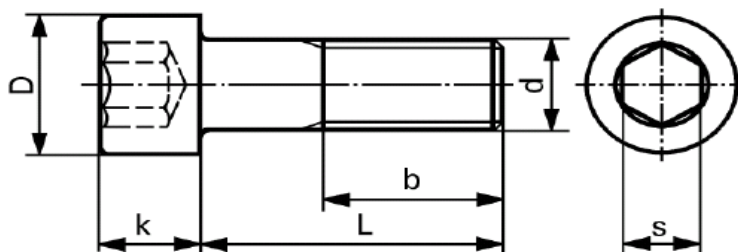

Rozměry	M1,4	M1,6	M02	M2,5	M03	M04	M05	M06
s	1,3	1,5	1,5	2	2,5	3	4	5
k	1,4	1,6	2	2,5	3	4	5	6
D	2,6	3	3,8	4,5	5,5	7	8,5	10
b	14	15	16	17	18	20	22	24
TORX	–	–	TX6	TX8	TX10	TX20	TX25	TX30

Rozměry	M08	M10	M12	M14	M16	M18	M20	M22
s	6	8	10	12	14	14	17	17
k	8	10	12	14	16	18	20	22
D	13	16	18	21	24	27	30	33
b	28	32	36	40	44	48	52	56
TORX	TX45	TX50	TX55	TX60	TX70	TX80	TX90	–

Rozměry	M24	M27	M30	M33	M36	M39	M42	M45
s	19	19	22	24	27	27	32	36
k	24	27	30	33	36	39	42	45
D	36	40	45	50	54	58	63	68
b	60	66	72	78	84	90	96	102
TORX	–	–	–	–	–	–	–	–

Rozměry	M48	M52	M56	M64	M72
s	36	36	41	46	55
k	48	52	56	64	72
D	72	78	84	96	108
b	108	116	124	140	156
TORX	–	–	–	–	–